


34W* / 3480lm* / 2200K-5000K / DALI /
Wide flood 76° / 1728mm

61242

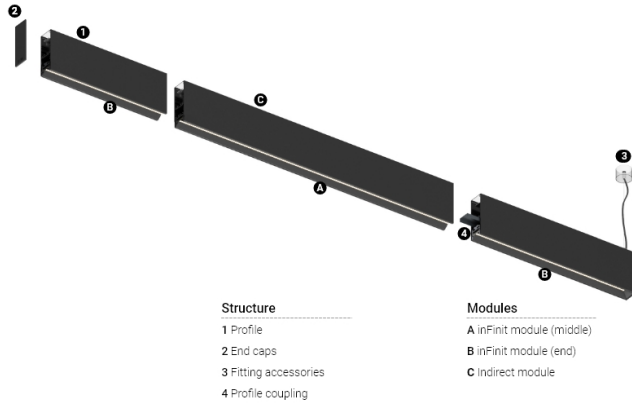

Design: OM + Bartenbach

GmbH

Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.


2200-5000K Tunable White.


LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam

Fonte de alimentação incluída.

IP20 | 230Vac | 50/60Hz




 LED	2200K-5000K	Fonte de Luz	Luminária
Potência		34W*	39,5W*
Fluxo		4380lm*	3480lm*
Eficiência		130lm/W	88lm/W
LOR		-	79%
UGR		-	<16




Ângulo de abertura
Wide flood 76°

Aplicação



Peso

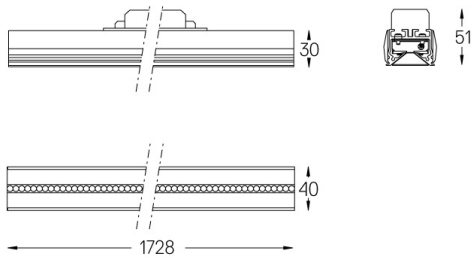

Acabamentos

- .01 Branco / RAL 9010
- .02 Preto / RAL 9005

Para fornecimento específico de drivers "DALI 2" por favor contactar:
support@om-light.com

Escolha o comprimento e a configuração do sistema exactamente como pretende, para modelar as funções de iluminação certas para diferentes tarefas. Para mais informações, contacte: support@om-light.com