


Compatibility with other modules must be confirmed with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach GmbH  
Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Fonte de alimentação incluída.  
IP20 | 230Vac | 50/60Hz

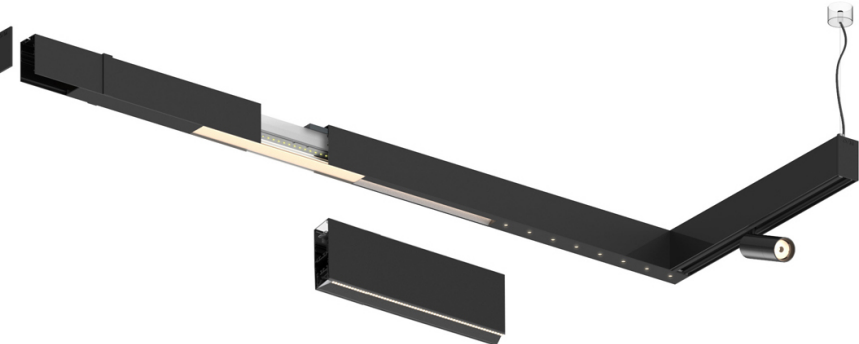


|            |         |              |                    |
|------------|---------|--------------|--------------------|
|            | 3000K   | Fonte de Luz | Luminária          |
| Potência   | 27W     |              | 32W                |
| Fluxo      | 3360lm  |              | 2720lm             |
| Eficiência | 127lm/W |              | 87lm/W             |
| LOR        | -       |              | 0.8100000000000001 |
| UGR        | -       |              | <13                |



Ângulo de abertura  
Flood 65°

Aplicação

Peso

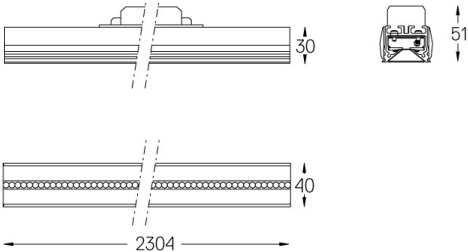

- Acabamentos
- .01 Branco / RAL 9010
  - .02 Preto / RAL 9005

Para fornecimento específico de drivers "DALI 2" por favor contactar: [support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks. For further information please contact: [support@om-light.com](mailto:support@om-light.com)