

26W / 1740lm / 2700K / DALI / Medium 31° /  
 611mm

**63929**


Design: O/M + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.

Aluminium anodised end caps with electrostatic 100% polyester paint with textured-finish.

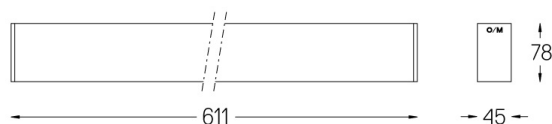
Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision45 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source. Fitting accessories for pendant version ordered separately.

 LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
 Power supply included.  
 IP20 | 230Vac | 50/60Hz


LED	2700K	Light Source	Luminaire
Power		26W	31,7W
Flux		2400lm	1740lm
Efficiency		92lm/W	55lm/W
LOR		-	73%
UGR		-	<10


 Beam angle  
**Medium 31°**

Application


 Weight  
**1,3Kg**

**Finishes**

- .01 White / RAL 9010
- .02 Black / RAL 9005

**Mandatory**
**54036** Pendant direct fitting accessory

**56051** Clear Base DALI

ø60x35mm

 For the specific supply of "DALI 2" drivers, please contact:  
[support@om-light.com](mailto:support@om-light.com)