

17+35W / 1800+1700lm / 4000K / DALI /
 Wide flood 76° / batwing / 1480mm

60541

Product timing available by request




Design: OM + Bartenbach GmbH
 Pendant direct and indirect luminaire with housing made of aluminium in matte finish.
 Aluminium anodised end caps with matt finish.
 Linear lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.
 Indirect light: Lenses for batwing effect protected by a transparent polycarbonate diffuser.
 Fitting accessories ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
 Power supply included.
 IP20 | 230Vac | 50/60Hz



LED	4000K	Light Source	Luminaire
Power		17+35W	20+40W
Flux		2250+2150lm	1800+1700lm
Efficiency		85lm/W	57lm/W
LOR		-	80%
UGR		-	<19

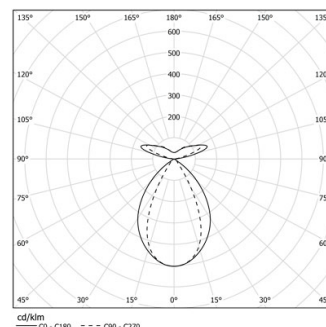


Beam angle
 Wide flood 76° /
 batwing

Application



Weight
 5,2Kg

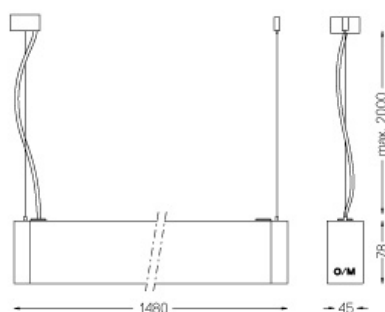

Finishes

- .04 Matt White
- .05 Matt Black

Mandatory

59054 Pendant direct/indirect fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:
 support@om-light.com