


174W / 14500lm / 3000K / DALI / Diffuse /
2895mm

62071

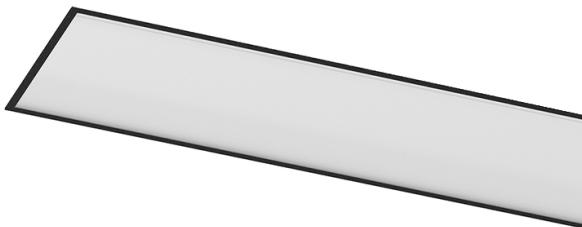

Design: Eduardo Souto de Moura
 Recessed luminaire with housing made of aluminium profile with 25micron maximum corrosion resistance anodization with matt finish or with textured electrostatic 100% polyester paint.
 Frosted polycarbonate diffuser with user friendly clipping system.
 Aluminium anodised end caps with matt finish or electrostatic 100% polyester paint with textured-finish.
 Fitting accessories ordered separately.

LED CRI>80 / >50.000h, L80/B10 / 3-step MacAdam
 Power supply included.
 IP54 | 230Vac | 50/60Hz



3000K

Light Source Luminaire


Power 174W 201W

Flux 23500lm 14500lm

Efficiency 134lm/W 72lm/W

LOR - 62%

UGR - <25

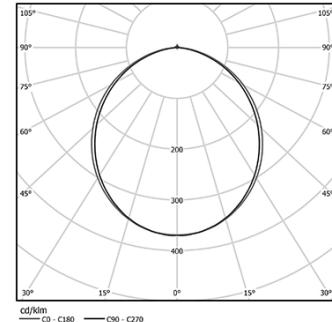

Beam angle
Diffuse

Application

Weight
13Kg

mm

122x2885


Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005
- .10 Anodised aluminium

Mandatory

53080 Recessed fitting accessory

For the specific supply of "DALI 2" drivers, please contact: support@om-light.com
 O/M recommends that any false ceilings intended for recessed products should be installed only after the products to be used have been chosen. The same applies when preparing openings for this type of product. O/M recommends reinforcing false ceilings close to any such openings, in accordance with the characteristics of the product to be recessed. The cutout dimensions are for plasterboard ceilings. For other type of material please contact: support@om-light.com

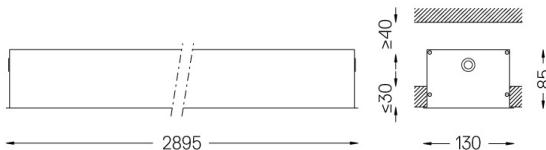

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU
 supplemented by 2021/340/EU Energy Consumption Labelling
 Ordinance. This product contains light sources of efficiency class D
 Model Identifier WU-M-526-S-BC-830, WU-M-536-S-BC-830