

# One



# One

One is the premium downlight for general and accent lighting with outstanding visual comfort and glare control, using high-definition Lightcore optic micro-reflectors at extremely precise beam angles. Its newest evolution features a die-cast body, more beam angles and an IP65-rated option for even more versatility.



# One

## Body

Aluminium die-cast body and heat sink with electrostatic 100% polyester paint finish. Stainless steel springs. Option IP65 available.

## Optics

Lightcore is built based on micro surfaces with complex geometry coated with aluminium alloy, creating a high-gloss, entirely mirrored surface. Accurate reflector for a defined and controlled beam of light, achieving maximum efficiency. Developed in partnership with Bartenbach GmbH.

## Accessories

Recessing accessory for trimless version is available.

## Light source

O/M LED modules with excellent colour consistency (2 step-MacAdam) and long operating lifespan (>50.000h; L80/B10). LED CRI>90 2700K, 3000K; CRI>80 4000K, Tunable White.



Lightcore optics



LIGHT  
CORE

Suitable for wet  
areas, IP65.




Tunable white




TW

# One


Trim Ø85mm  
Trimless Ø85mm




Spot  
UGR<10



Medium  
UGR<10




Flood  
UGR<16



Wallwasher

The wallwasher light effect can cover the wall from an approximate distance of  $\frac{1}{4}$  the wall's height with visual comfort avoiding glare and no shadow projection on the wall.

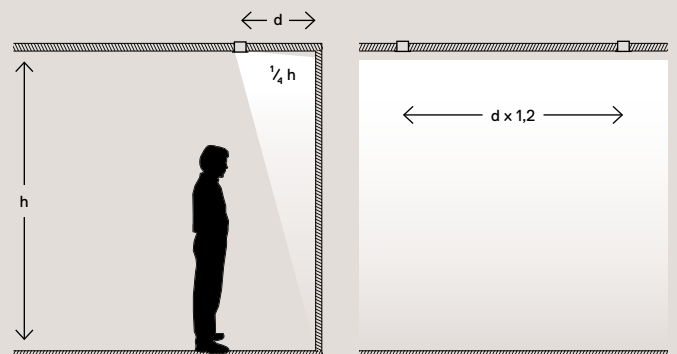

Finishes

○ .01 White

● .02 Black

# One



Not included

Recessing accessory for trimless version

59014

Ø100

Ceiling-recessed luminaire with aluminium body.  
Lightcore optics for defined and perfectly controlled beam of light.  
Recessing accessory supplied separately for trimless version.

LED CRI>90 2700K, 3000K; CRI>80 4000K, Tunable White  
>50.000h, L80/B10




2-step MacAdam / power supply included.




IP20/IP65 | 230Vac | 50/60Hz




## One




## Spot




## Medium



## Flood



## Wallwasher



	Luminaire Dimensions	Light Source Power	Light Source Flux	Luminaire Flux	On/Off Code	DALI Code
<b>One</b>						
<b>2700K</b>						
Spot 15°	ø85x120	6,3W	620lm	370lm	60130	60138
	ø85x120	13W	1220lm	720lm	60131	60139
Medium 40°	ø85x100	6,3W	620lm	480lm	60132	60140
	ø85x100	13W	1220lm	940lm	60133	60141
Flood 56°	ø85x100	6,3W	620lm	570lm	60134	60142
	ø85x100	13W	1220lm	1120lm	60135	60143
WallWasher	ø85x89	6,3W	620lm	500lm	60136	60144
	ø85x89	13W	1220lm	970lm	60137	60145
<b>3000K</b>						
Spot 15°	ø85x120	6,3W	660lm	400lm	60146	60154
	ø85x120	13W	1310lm	760lm	60147	60155
Medium 40°	ø85x100	6,3W	660lm	510lm	60148	60156
	ø85x100	13W	1310lm	980lm	60149	60157
Flood 56°	ø85x100	6,3W	660lm	610lm	60150	60158
	ø85x100	13W	1310lm	1170lm	60151	60159
WallWasher	ø85x89	6,3W	660lm	530lm	60152	60160
	ø85x89	13W	1310lm	1010lm	60153	60161
<b>4000K</b>						
Spot 15°	ø85x120	6,3W	820lm	490lm	60162	60170
	ø85x120	13W	1630lm	970lm	60163	60171
Medium 40°	ø85x100	6,3W	820lm	640lm	60164	60172
	ø85x100	13W	1630lm	1260lm	60165	60173
Flood 56°	ø85x100	6,3W	820lm	760lm	60166	60174
	ø85x100	13W	1630lm	1490lm	60167	60175
WallWasher	ø85x89	6,3W	820lm	660lm	60168	60176
	ø85x89	13W	1630lm	1300lm	60169	60177
<b>Tunable White 2200K-5000K*</b>						*3000K values
Spot 15°	ø85x120	5,6W	460lm	240lm		60178
Medium 40°	ø85x100	5,6W	460lm	320lm		60179
Flood 56°	ø85x100	5,6W	460lm	380lm		60180
WallWasher	ø85x89	5,6W	460lm	330lm		60181

Finishes ○ .01 White ● .02 Black

	Luminaire Dimensions	Light Source Power	Light Source Flux	Luminaire Flux	On/Off Code	DALI Code
<b>One IP65</b>						
<b>2700K</b>						
Spot 15°	ø85x120	6,3W	620lm	320lm	60182	60190
	ø85x120	13W	1220lm	650lm	60183	60191
Medium 40°	ø85x100	6,3W	620lm	430lm	60184	60192
	ø85x100	13W	1220lm	850lm	60185	60193
Flood 56°	ø85x100	6,3W	620lm	510lm	60186	60194
	ø85x100	13W	1220lm	1010lm	60187	60195
WallWasher	ø85x89	6,3W	620lm	440lm	60188	60196
	ø85x89	13W	1220lm	880lm	60189	60197
<b>3000K</b>						
Spot 15°	ø85x120	6,3W	660lm	350lm	60198	60206
	ø85x120	13W	1310lm	690lm	60199	60207
Medium 40°	ø85x100	6,3W	660lm	460lm	60200	60208
	ø85x100	13W	1310lm	910lm	60201	60209
Flood 56°	ø85x100	6,3W	660lm	540lm	60202	60210
	ø85x100	13W	1310lm	1080lm	60203	60211
WallWasher	ø85x89	6,3W	660lm	470lm	60204	60212
	ø85x89	13W	1310lm	940lm	60205	60213
<b>4000K</b>						
Spot 15°	ø85x120	6,3W	820lm	430lm	60214	60222
	ø85x120	13W	1630lm	860lm	60215	60223
Medium 40°	ø85x100	6,3W	820lm	570lm	60216	60224
	ø85x100	13W	1630lm	1140lm	60217	60225
Flood 56°	ø85x100	6,3W	820lm	680lm	60218	60226
	ø85x100	13W	1630lm	1350lm	60219	60227
WallWasher	ø85x89	6,3W	820lm	590lm	60220	60228
	ø85x89	13W	1630lm	1170lm	60221	60229

Finishes    ○ .01 White    ● .02 Black



**[www.om-light.com](http://www.om-light.com)**

27.07.2020